Rotary Servomotors SGMGV



Model Designations

Without Gears

SGMGV

03

Α

2

F

 Σ -VSeries Servomotor SGMGV

1st+2nd digits Rated Output

Code	Specifications
03	300 W
05	450 W
09	850 W
13	1.3 kW
20	1.8 kW
30	2.9 kW
44	4.4 kW
55	5.5 kW
75	7.5 kW
1A	11 kW
1E	15 kW

3rd digit Power Supply Voltage

Code	Specifications						
Α	200 VAC						
D	400 VAC						

4th digit Serial Encoder

Code	Specifications
3	20-bit absolute (standard)
D	20-bit incremental (standard)

5th digit Design Revision Order

Code	Specifications
Α	Standard

6th digit Shaft End

Code	Specifications
2	Straight without key (standard)
6	Straight with key and tap (optional)

7th digit Options

Code	Specifications
1	Without options (not used in Europe)
F	With dust seal
Н	With dust seal and holding brake (24 VDC)
E	With oil seal and holding brake (24 VDC)
S	With oil seal

Features

- High-speed driving of feed shafts for various machines
- Wide selection: 300 W to 15 kW capacity, holding brake option
- Mounted serial encoder: 20 bits, high resolution
- Protective structure: IP67

Application Examples

- Machine tools
- Transfer machines
- Material handling machines
- Food processing equipment

Configurations of connectors for the main circuit vary depending on servomotor capacity.



SGMGV-03/-05

The connectors are used only for Yaskawa servomotors.

Order the connectors specified by Yaskawa.

Both protective structure IP67 and European Safety Standards compliant connectors are available.

For details, refer to page 57 and 58.



SGMGV-09 to -1E

The connectors for these models are round. The connectors specified by Yaskawa are required. Note that the connectors vary depending on the operation environment of servomotors.

Two types of connectors are available.

- Standard connectors:
 - For details, refer to page 61 and 62.
- Protective structure IP67 and European Safety Standards compliant connectors:

For details, refer to page 63.

Ratings and Specifications

Time Rating: Continuous Vibration Class: V15

Insulation Resistance: 500 VDC, 10 $\mbox{M}\Omega$ min.

Ambient Temperature: 0 to 40°C Excitation: Permanent magnet Mounting: Flange-mounted

Thermal Class: F

200-V Class

Withstand Voltage: 1500 VAC for one minute (200-V Class)
1800 VAC for one minute (400-V Class)

Enclosure: Totally enclosed, self-cooled, IP67

(except for shaft opening)

Ambient Humidity: 20% to 80% (no condensation)

Drive Method: Direct drive

Rotation Direction: Counterclockwise (CCW) with forward run reference when viewed from the load side

200-V Olass												
Servomotor Model: SGMGV-□□		03A	05A	09A	13A	20A	30A	44A	55A	75A	1AA	1EA
Rated Output*1	kW	0.3	0.45	0.85	1.3	1.8	2.9 2.4* ²	4.4	5.5	7.5	11	15
Rated Torque ⁺¹	Nm	1.96	2.86	5.39	8.34	11.5	18.6 15.1* ²	28.4	35.0	48.0	70.0	95.4
Instantaneous Peak Torque*1	Nm	5.88	8.92	13.8	23.3	28.7	45.1	71.1	87.6	119	175	224
Rated Current*1	Arms	2.8	3.8	6.9	10.7	16.7	23.8 19.6* ²	32.8	42.1	54.7	58.6	78
Instantaneous Max. Current*1	Arms	8	11	17	28	42	56	84	110	130	140	170
Rated Speed*1	min ⁻¹		1500									
Max. Speed*1	min ⁻¹					3000					2000	
Torque Constant	Nm/Arms	0.776	0.854	0.859	0.891	0.748	0.848	0.934	0.871	0.957	1.32	1.37
Rotor Moment of Inertia	×10 ⁻⁴ kgm²	2.48 (2.73)	3.33 (3.58)	13.9 (16)	19.9 (22)	26 (28.1)	46 (54.5)	67.5 (76.0)	89.0 (97.5)	125 (134)	242 (261)	303 (341)
Rated Power Rate*1	kW/s	15.5 (14.1)	24.6 (22.8)	20.9 (18.2)	35.0 (31.6)	50.9 (47.1)	75.2 (63.5)	119 (106)	138 (126)	184 (172)	202 (188)	300 (283)
Rated Angular Acceleration*1	rad/s²	7900 (7180)	8590 (7990)	3880 (3370)	4190 (3790)	4420 (4090)	4040 (3410)	4210 (3740)	3930 (3590)	3840 (3580)	2890 (2680)	3150 (2960)
Applicable SERVOPACK	SGDV-	3R8A	3R8A	7R6A	120A	180A	330A 200A*2	330A	470A	550A	590A	780A

^{*1:} These items and torque-motor speed characteristics quoted in combination with a SERVOPACK are at an armature winding temperature of 20°C.

400-V Class

Servomotor Model: SGMGV-	03D	05D	09D	13D	20D	30D	44D	55D	75D	1AD	1ED	
Rated Output	kW	0.3	0.45	0.85	1.3	1.8	2.9	4.4	5.5	7.5	11	15
Rated Torque	Nm	1.96	2.86	5.39	8.34	11.5	18.6	28.4	35.0	48.0	70.0	95.4
Instantaneous Peak Torque	Nm	5.88	8.92	13.8	23.3	28.7	45.1	71.1	87.6	119	175	224
Rated Current	Arms	1.4	1.9	3.5	5.4	8.4	11.9	16.5	20.8	25.7	28.1	37.2
Instantaneous Max. Current	Arms	4	5.5	8.5	14	20	28	40.5	52	65	70	85
Rated Speed*	min ⁻¹		1500									
Max. Speed*	min ⁻¹		3000							2000		
Torque Constant	Nm/Arms	1.55	1.71	1.72	1.78	1.50	1.70	1.93	1.80	1.92	2.64	2.74
Rotor Moment of Inertia	2041 2	2.48	3.33	13.9	19.9	26	46	67.5	89.0	125	242	303
notor Moment of mertia	×10 ⁻⁴ kgm ²	(2.73)	(3.58)	(16)	(22)	(28.1)	(54.5)	(76.0)	(97.5)	(134)	(261)	(341)
Rated Power Rate	kW/s	15.5	24.6	20.9	35.0	50.9	75.2	119	138	184	202	300
Rated Power Rate	KVV/S	(14.1)	(22.8)	(18.2)	(31.6)	(47.1)	(63.5)	(106)	(126)	(172)	(188)	(283)
Dated Assular Assalaration	rad/s ²	7900	8590	3880	4190	4420	4040	4210	3930	3840	2890	3150
Rated Angular Acceleration	rau/s-	(7180)	(7990)	(3370)	(3790)	(4090)	(3410)	(3740)	(3590)	(3580)	(2680)	(2960)
Applicable SERVOPACK	SGDV-	1R9D	1R9D	3R5D	5R4D	8R4D	120D	170D	210D	260D	280D	370D

^{*:} These items and torque-speed characteristics quoted in combination with a SERVOPACK are at an armature winding temperature of 20°C.

SGMGV-03D/-05D: 250 mm \times 250 mm \times 6 mm (aluminum) SGMGV-09D/-13D/-20D: 400 mm \times 400 mm \times 20 mm (iron) SGMGV-30D/-44D/-55D/-75D: 550 mm \times 550 mm \times 30 mm (iron) SGMGV-1AD/-1ED: 650 mm \times 650 mm \times 35 mm (iron)

^{*2:} When using SGDV-200A SERVOPACKs with SGMGV-30A servomotors, use these values.

Notes: 1 The values in parentheses are for servomotors with holding brakes.


² The above specifications show the values under the cooling condition when the following heat sinks are mounted on the servomotors. SGMGV-03A/-05A: 250 mm \times 250 mm \times 6 mm (aluminum) SGMGV-09A/-13A/-20A: 400 mm \times 400 mm \times 20 mm (iron) SGMGV-30A/-44A/-55A/-75A: 550 mm \times 550 mm \times 35 mm (iron) SGMGV-1AA/-1EA: 650 mm \times 650 mm \times 35 mm (iron)

Notes: 1 The values in parentheses are for servomotors with holding brakes.

² The above specifications show the values under the cooling condition when the following heat sinks are mounted on the servomotors.

Ratings and Specifications

● Torque-Speed Characteristics (200 V/400 V) A: Continuous Duty Zone B: Intermittent Duty Zone

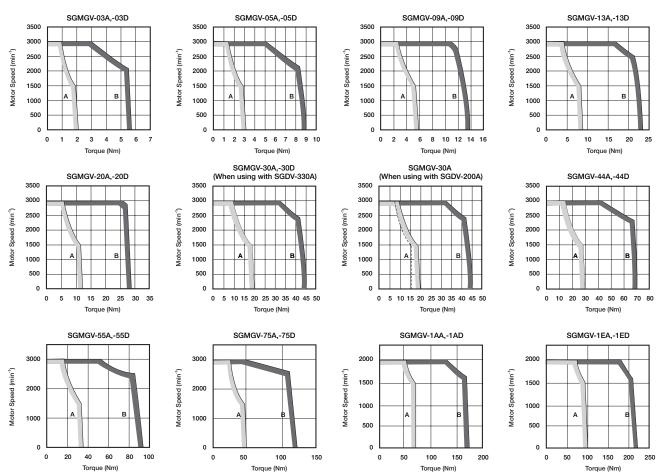

Notes: 1 When the effective torque during intermittent duty is within the rated torque, the servomotor can be used within the intermittent duty zone.

Holding Brake Electrical Specifications

		Holding Brake Specifications						
Servomotor Model	Servomotor Rated Output	Holding	Rated Volta	age 24 VDC				
	kW	Torque Nm	Capacity W	Rated Current A (at 20°C)				
SGMGV-03	0.3	4.5	10	0.42				
SGMGV-05	0.45	4.5	10	0.42				
SGMGV-09	0.85	12.7	10	0.41				
SGMGV-13	1.3	19.6	10	0.41				
SGMGV-20	1.8	19.6	10	0.41				
SGMGV-30	2.9	43.1	18.5	0.77				
SGMGV-44	4.4	43.1	18.5	0.77				
SGMGV-55	5.5	72.6	25	1.05				
SGMGV-75	7.5	72.6	25	1.05				
SGMGV-1A	11	84.3	32	1.33				
SGMGV-1E	15	114.6	35	1.46				

Notes: 1 The holding brake is only used to hold the load and cannot be used to stop the servomotor.

- 2 The holding brake open time and holding brake operation time vary depending on which discharge circuit is used.
- Make sure holding brake open time and holding brake operation time are correct for your servomotor.
- 3 A 24-VDC power supply is provided by customers.

² When the power cable length exceeds 20 m, note that the intermittent duty zone of the Torque-Speed Characteristics will shrink as the line-to-line voltage drops.

Ratings and Specifications

Allowable Load Moment of Inertia at the Motor Shaft

The rotor moment of inertia ratio is the value for a servomotor without a gear and a holding brake.

	Servomotor Model	Servomotor Rated Output	Allowable Load Moment of Inertia (Rotor Moment of Inertia Ratio)
ſ	SGMGV-03 to -1E	0.3 to 1.5 kW	5 times

Load Moment of Inertia

The larger the load moment of inertia, the worse the movement response of the load.

The allowable load moment of inertia (J_L) depends on the motor capacity, as shown above. This value is provided strictly as a guideline and results may vary depending on servomotor drive conditions.

Use the AC servo drive capacity selection program SigmaJunmaSize+ to check the operation conditions. The program can be downloaded for free from our web site (http://www.yaskawa.eu.com).

An overvoltage alarm (A.400) is likely to occur during deceleration if the load moment of inertia exceeds the allowable load moment of inertia. SERVOPACKs with a built-in regenerative resistor may generate a regenerative overload alarm (A.320). Take one of the following steps if this occurs.

- Reduce the torque limit.
- Reduce the deceleration rate.
- Reduce the maximum speed.
- Install an external regenerative resistor if the alarm cannot be cleared using the steps above. Refer to Regenerative Resistors on page 364.

Allowable Radial and Thrust Loads


Design the mechanical system so thrust and radial loads applied to the servomotor shaft end during operation fall within the ranges shown in the table.


Servom	otor Model	Allowable Radial Load (Fr) N	Allowable Thrust Load (Fs) N	LF mm	Reference Diagram		
	03□□A21	490	98	37			
	05□□A21	490	98	40			
	09□□A21	490	98	58	LF 		
	13□□A21	686	343	58			
	20□□A21	980	392	58	Fr		
SGMGV-	30□□A21	1470	490	79			
	44□□A21	1470	490	79	- - · - · - · - · - · - · - · -		
	55□□A21	1764	588	113			
	75□□A21	1764	588	113			
	1A□□A21	1764	588	116			
	1E□□A21	4998	2156	116			

External Dimensions Units: mm

Without Holding Brakes

(1) 300 W, 450 W

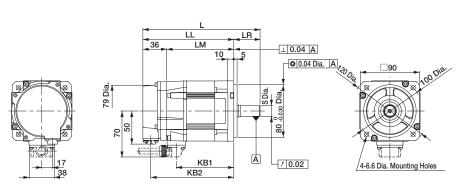



Note: For the specifications of the other shaft ends, refer to page 56.

Model			LM	LR	KB1	VD0	Shaft End I	Dimensions	Approx. Mass	
SGMGV-	_	LL	LIVI	LN	KDI	KB2	ND2	S	Q	kg
03□□A21	163	126	90	37	75	114	14 -0.011	25	2.6	
05□□A21	179	139	103	40	88	127	16 -0.011	30	3.2	

Note: Models with oil seals are of the same configuration.

• Cable Specifications for Encoder-end Connector (20-bit Encoder)



Receptacle: CM10-R10P-D

Applicable plug (To be provided by the customer)

Plug: CM10-AP10S- D (L-shaped)
CM10-SP10S- D (Straight)

(Boxes (\square) indicate a value that varies,

depending on cable size.)

Manufacturer: DDK Ltd.

With an Absolute Encoder With an Incremental Encoder

1	PS	6	BAT (+)					
2	/PS	7	_					
3	-	8	-					
4	PG 5V	9	PG 0V					
5	BAT (-)	10	FG (Frame ground)					

1	PS	6	-					
2	/PS	7	_					
3	-	8	-					
4	PG 5V	9	PG 0V					
5	-	10	FG (Frame ground)					

• Cable Specifications for Servomotor-end Connector




PE	FG (Frame ground)
5	_
4	-
3	Phase U
2	Phase V
1	Phase W

Manufacturer: Japan Aviation Electronics Industry,Ltd.

External Dimensions Units: mm

(2) 850 W to 7.5 kW

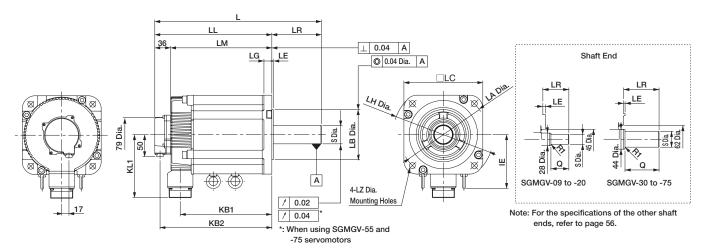

Model SGMGV-	L	LL	LM	LR	KB1	KB2	ΙE	KL1		Flang	e Face	Dime	nsions			Shaft I Dimens		Approx. Mass
SGIVIGV-									LA	LB	LC	LE	LG	LH	LZ		Q	kg
09□□A21	195	137	101	58	83	125	-	104	145	110 0 -0.035	130	6	12	165	9	19 0 -0.013	40	5.5
13□□A21	211	153	117	58	99	141	-	104	145	110 0 -0.035	130	6	12	165	9	22 0 -0.013	40	7.1
20□□A21	229	171	135	58	117	159	-	104	145	110 0 -0.035	130	6	12	165	9	24 0 -0.013	40	8.6
30□□A21	239	160	124	79	108	148	-	134	200	114.3 0 -0.025	180	3.2	18	230	13.5	35 ^{+0.01}	76	13.5
44□□A21	263	184	148	79	132	172	-	134	200	114.3 0 -0.025	180	3.2	18	230	13.5	35 ^{+0.01}	76	17.5
55□□A21	334	221	185	113	163	209	123	144	200	114.3 0 -0.025	180	3.2	18	230	13.5	42 0 -0.016	110	21.5
75□□A21	380	267	231	113	209	255	123	144	200	114.3 0 -0.025	180	3.2	18	230	13.5	42 0 -0.016	110	29.5

Note: Models with oil seals are of the same configuration.

• Cable Specifications for Encoder-end Connector (20-bit Encoder)



Receptacle: CM10-R10P-D

Applicable plug (To be provided by the customer)
Plug: CM10-AP10S
-D (L-shaped)

CM10-SP10S
-D (Straight)

(Boxes (□) indicate a value that varies,

depending on cable size.)

Manufacturer: DDK Ltd.

• Cable Specifications for Servomotor-end Connector



Α	Phase U
В	Phase V
С	Phase W
D	FG (Frame ground)

Manufacturer: DDK Ltd.


١	With an Absolute Encoder										
Ī	1	PS	6	BAT (+)							
ĺ	2	/PS	7	-							
I	3	-	8	-							
ĺ	4	PG 5V	9	PG 0V							
ĺ	5	BAT (-)	10	FG (Frame ground)							

With an Incremental Encoder

PS	6	_					
/PS	7	-					
_	8	_					
PG 5V	9	PG 0V					
-	10	FG (Frame ground)					
	/PS _	/PS 7 - 8 PG 5V 9					

External Dimensions Units: mm

(3) 11 kW, 15 kW

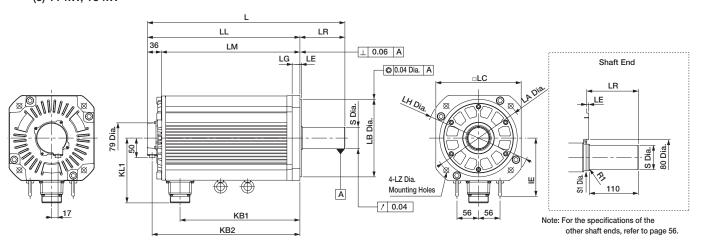

Model SGMGV-	L	LL	LM	LR	KB1	KB2	ΙE	KL1	Flange Face Dimensions						Shaft End Dimensions			
Salviav-									LA	LB	LC	LE	LG	LH	LZ	S	S1	kg
1A□□A21	447	331	295	116	247	319	150	168	235	200 -0.046	220	4	20	270	13.5	42 0 -0.016	50	57
1E□□A21	509	393	357	116	309	381	150	168	235	200 -0.046	220	4	20	270	13.5	55 ^{+0.030} _{+0.011}	60	67

Note: Models with oil seals are of the same configuration.

• Cable Specifications for Encoder-end Connector (20-bit Encoder)

Receptacle: CM10-R10P-D Applicable plug (To be provided by the customer)

Plug: CM10-AP10S- D (L-shaped)
CM10-SP10S- D (Straight)

(Boxes (\square) indicate a value that varies,

depending on cable size.)

Manufacturer: DDK Ltd.

• Cable Specifications for Servomotor-end Connector



Α	Phase U
В	Phase V
С	Phase W
D	FG (Frame ground)

Manufacturer: DDK Ltd.

With an Absolute Encoder

With an Absolute Encoder										
1	PS	6	BAT (+)							
2	/PS	7	-							
3	-	8	-							
4	PG 5V	9	PG 0V							
5	BAT (-)	10	FG (Frame ground)							


With an Incremental Encoder


1	PS	6	-					
2	/PS	7	-					
3	-	8	-					
4	PG 5V	9	PG 0V					
5	-	10	FG (Frame ground)					


External Dimensions Units: mm

With Holding Brakes

(1) 300 W, 450 W



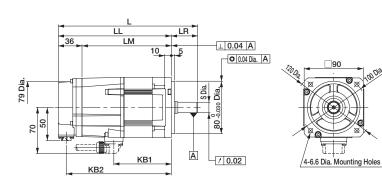



Note: For the specifications of the other shaft ends, refer to page 56.

Ì	Model			. LM LR KB1 KB2		Shaft End I	Approx. Mass			
	SGMGV-	_		LIVI	LN	KBI	ND2	S	Q	kg
	03□□A2□	196	159	123	37	75	147	14 ⁰ _{-0.011}	25	3.6
	05□□A2□	212	172	136	40	88	160	16 ⁰ _{-0.011}	30	4.2

Note: Models with oil seals are of the same configuration.

 Cable Specifications for Encoder-end Connector (20-bit Encoder)



Receptacle: CM10-R10P-D
Applicable plug (To be provided by the customer)
Plug: CM10-AP10S- D (L-shaped)
CM10-SP10S- D (Straight)

(Boxes (□) indicate a value that varies, depending on cable size.)

Manufacturer: DDK Ltd.

With an Absolute Encoder

1	PS	6	BAT (+)
2	/PS	7	_
3	-	8	-
4	PG 5V	9	PG 0V
5	BAT (-)	10	FG (Frame ground)

With an Incremental Encoder

1	PS	6	-
2	/PS	7	_
3	-	8	-
4	PG 5V	9	PG 0V
5	-	10	FG (Frame ground)

Cable Specifications for Servomotor-end Connector




PE	FG (Frame ground)
5	Brake terminal
4	Brake terminal
3	Phase U
2	Phase V
1	Phase W

Manufacturer: Japan Aviation Electronics Industry,Ltd.

External Dimensions Units: mm

(2) 850 W to 7.5 kW

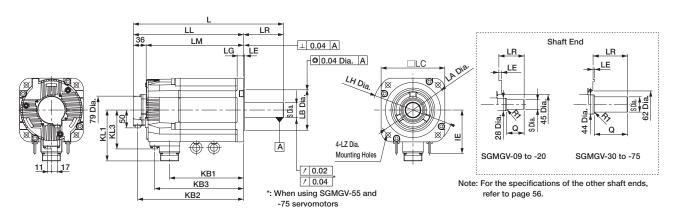

Model SGMGV-	L	LL	LM	LR	KB1	KB2	КВ3	ΙE	KL1	KL3		Flange Face Dimensions				Shaft E Dimens	Approx. Mass			
Salviav-											LA	LB	LC	LE	LG	LH	LZ	S	Q	kg
09□□A2□	231	173	137	58	83	161	115	-	104	80	145	110 0 -0.035	130	6	12	165	9	19 0 -0.013	40	7.5
13□□A2□	247	189	153	58	99	177	131	-	104	80	145	110 0 -0.035	130	6	12	165	9	22 0 -0.013	40	9.0
20□□A2□	265	207	171	58	117	195	149	-	104	80	145	110 0 -0.035	130	6	12	165	9	24 0 -0.013	40	11.0
30□□A2□	287	208	172	79	108	196	148	-	134	110	200	114.3 0 -0.025	180	3.2	18	230	13.5	35 ^{+0.01}	76	19.5
44□□A2□	311	232	196	79	132	220	172	-	134	110	200	114.3 0 -0.025	180	3.2	18	230	13.5	35 ^{+0.01}	76	23.5
55□□A2□	378	265	229	113	163	253	205	123	144	110	200	114.3 ⁰ _{-0.025}	180	3.2	18	230	13.5	42 0 -0.016	110	27.5
75□□A2□	424	311	275	113	209	299	251	123	144	110	200	114.3 0 -0.025	180	3.2	18	230	13.5	42 0 -0.016	110	35

Note: Models with oil seals are of the same configuration.

• Cable Specifications for Encoder-end Connector (20-bit Encoder)



Receptacle: CM10-R10P-D Applicable plug (To be provided by the customer)

Plug: CM10-AP10S-□-D (L-shaped) CM10-SP10S-□-D (Straight)

(Boxes (\square) indicate a value that varies, depending on cable size.)

Manufacturer: DDK Ltd.

With a	n Absolute E	Encode	er		With an Incremental Encoder							
1	PS	6	BAT (+)		1	PS	6	-				
2	/PS	7	_		2	/PS	7	_				
3	-	8	-		3	-	8	-				
4	PG 5V	9	PG 0V		4	PG 5V	9	PG 0V				
5	BAT (-)	10	FG (Frame ground)		5	-	10	FG (Frame ground)				

• Cable Specifications for Servomotor-end Connector



Α	Phase U
В	Phase V
С	Phase W
D	FG (Frame ground)

Manufacturer: DDK Ltd.

• Cable Specifications for Brake-end Connector



Receptacle: CM10-R2P-D Applicable plug (To be provided by the customer)
Plug: CM10Y-AP2S
-D-G1 (L-shaped)

CM10-SP2S-□-D (Straight) (Boxes (□) indicate a value that varies,


depending on cable size.) Manufacturer: DDK Ltd.

Brake terminal
Brake terminal

Note: No polarity for connection to the brake terminals

External Dimensions Units: mm

(3) 11 kW, 15 kW

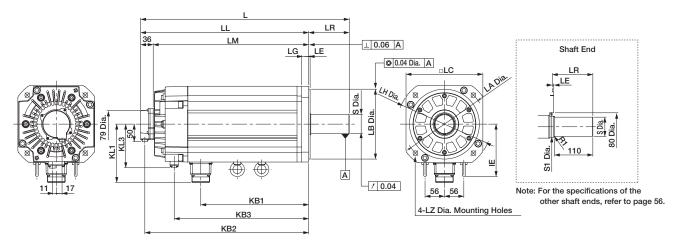

Model	L	LL	LM	LR	KB1	KB2	КВ3		KL1	KL3		Flange Face Dimensions				Shaft E Dimens		Approx. Mass		
SGMGV-											LA	LB	LC	LE	LG	LH	LZ			kg
1A□□A2□	498	382	346	116	247	370	315	150	168	125	235	200 -0.046	220	4	20	270	13.5	42 0 -0.016	50	65
1E□□A2□	598	482	446	116	309	470	385	150	168	125	235	200 -0.046	220	4	20	270	13.5	55 ^{+0.030} _{+0.011}	60	85

Note: Models with oil seals are of the same configuration.

• Cable Specifications for Encoder-end Connector (20-bit Encoder)



Receptacle: CM10-R10P-D
Applicable plug (To be provided by the customer)
Plug: CM10-AP10S-D (L-shaped)
CM10-SP10S-D (Straight)
(Boxes (
) indicate a value that varies,
depending on cable size.)

Manufacturer: DDK Ltd.

• Cable Specifications for Servomotor-end Connector



Α	Phase U
В	Phase V
С	Phase W
D	FG (Frame ground)

Manufacturer: DDK Ltd.

With an Absolute Encoder

1	PS	6	BAT (+)
2	/PS	7	-
3	-	8	-
4	PG 5V	9	PG 0V
5	BAT (-)	10	FG (Frame ground)

With an Incremental Encoder

1	PS	6	-
2	/PS	7	_
3	_	8	_
4	PG 5V	9	PG 0V
5	-	10	FG (Frame ground)

• Cable Specifications for Brake-end Connector



Receptacle: CM10-R2P-D
Applicable plug (To be provided by the customer)
Plug: CM10Y-AP2S-□-D-G1 (L-shaped)
CM10-SP2S-□-D (Straight)
(Boxes (□) indicate a value that varies,
depending on cable size.)
Manufacturer: DDK Ltd.

Brake terminal	
Brake terminal	

Note: No polarity for connection to the brake terminals

External Dimensions Units: mm

Shaft End




Со	de	Specifications	Remarks
2	2	Straight without key	Standard
6	6	Straight with key and tap for one location (Key slot is JIS B1301-1996 fastening type)	Optional

Objett Food	Model SGMGV-									
Shaft End	03	05	09	13	20	30/44	55/75	1A	1E	
Code: 2 (Straight without Key)										
LR Q	LR	37	40	58	58	58	79	113	116	116
	Q	25	30	40	40	40	76	110	110	110
S Dia.	s	14 0 -0.011	16 0 -0.011	19 0 -0.013	22 0 -0.013	24 0 -0.013	35 ^{+0.01}	42 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	42 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	55 ^{+0.030} _{+0.011}
Code: 6 (Straight with Key and Tap)										
	LR	37	40	58	58	58	79	113	116	116
, LR .,	Q	25	30	40	40	40	76	110	110	110
	QK	15	20	25	25	25	60	90	90	90
Q QK U P	s	14 0 -0.011	16 0 -0.011	19 0 -0.013	22 0 -0.013	24 0 -0.013	35 ^{+0.01}	42 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	42 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	55 ^{+0.030} _{+0.011}
	W	5	5	5	6	8	10	12	12	16
N O O O		5	5	5	6	7	8	8	8	10
	U	3	3	3	3.5	4	5	5	5	6
	Р	M4 Screw, Depth 10		M5 Screw	, Depth 12	<u> </u>	M12 Screw, Depth 25		Screw, th 32	M20 Screw, Depth 40

Selecting Cables (SGMGV-03 / -05)


Cables Connections

• Standard Wiring (Max. encoder cable length: 20 m)



\bullet Encoder Cable Extension from 30 to 50 m

(See page 66.)



CAUTION

- Separate the servomotor power cable wiring from the I/O signal cable and encoder cable at least 30 cm, and do not bundle or run them in the same duct.
- When the power cable length exceeds 20 m, note that the intermittent duty zone of the *Torque-Speed Characteristics* will shrink as the line-to-line voltage drops.

Servomotor Power Cable

Servomotor Rated	Name	Length	Order No.	Specifications	Details
Output	Name	Lengui	Standard (Flexible) Type	opecinications	Details
		03 m	JZSP-CVM21-03-E-G#	SERVOPACK End Servomotor End	
		05 m	JZSP-CVM21-05-E-G#	50 mm L	(1)
	For Servomotor without Holding Brakes	10 m	JZSP-CVM21-10-E-G#		
		15 m	JZSP-CVM21-15-E-G#	Wire Markers	
		20 m	JZSP-CVM21-20-E-G#	M4 Crimped Terminals	
	For Servomotor with Holding Brakes	03 m	JZSP-CVM41-03-E-G#	SERVOPACK End Servomotor End	(2)
0.3 kW 0.45 kW		05 m	JZSP-CVM41-05-E-G#	50 mm L	
0.45 KW		10 m	JZSP-CVM41-10-E-G#		
	Holding Brakes	15 m	JZSP-CVM41-15-E-G#	Wire Markers	
		20 m	JZSP-CVM41-20-E-G#	M4 Crimped Terminals	
	Servomotor-end Connector Kit	-	JZSP-CVM9-1-E	Crimped Type (A crimp tool is required.)	(3)


^{*:} These flexible cables are provided as standard equipment.

Notes: Cables without connectors can be ordered on request, see (4) for specification. The digit "#" of the order number represents the design revision.


(Cont'd)

Selecting Cables (SGMGV-03 / -05)


(1) Wiring Specifications for Servomotors without Holding Brakes



(2) Wiring Specifications for Servomotor with Holding Brakes



Note: No polarity for connection to a holding brake.

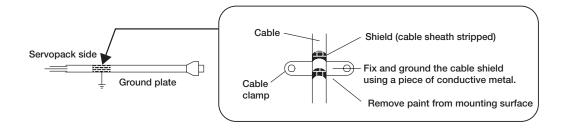

(3) Servomotor-end Connector Kit Specifications

Items	Specifications	External Dimensions mm
Order No.	JZSP-CVM9-1-E (Cables are not included.)	
Applicable Servomotors	SGMGV-03/-05	
Manufacturer	Japan Aviation Electronics Industry, Ltd.	38 39.6
Plug	JNYFX06SJ3	
Electrical Contact	ST-TMH-S-C1B	
Applicable Wire Size	AWG18 to 22	
Outer Diameter of Insulating Sheath	1.3 dia. to 1.8 dia.	
Mounting Screw	M3 Pan head screw	
Applicable Cable Outer Diameter	6.9 dia. to 8.3 dia.	

Note: A crimp tool (Model no.: CT160-3-TMH5B) is required. Contact the respective manufacturer for more information.

(4) Cable Specifications (Flexible Type)


Items	For Servomotor without Holding Brakes (4 wires)	For Servomotor with Holding Brakes (6 wires)
Cable Length	50 m	max.
Specifications	UL2586 (Rating temperature: 105°C) AWG20×4C For power line: AWG20 (0.55 mm²) Outer diameter of insulating sheath: 1.77 dia.	UL2586 (Rating temperature: 105°C) AWG20×6C For power line: AWG20 (0.55 mm²) Outer diameter of insulating sheath: 1.77 dia. For holding brake line: AWG20 (0.55 mm²) Outer diameter of insulating sheath: 1.77 dia.
Finished Dimensions	7.3±0.3 dia.	7.4±0.3 dia.
Internal Configuration and Lead Color	Red Green/yellow White	Green/ yelow Black Blue Red


Selecting Cables (SGMGV-09 to -1E)

Cables Connections

• Standard Wiring (Max. encoder cable length: 20 m)

• Encoder Cable Extension from 30 to 50 m (See page 66.)

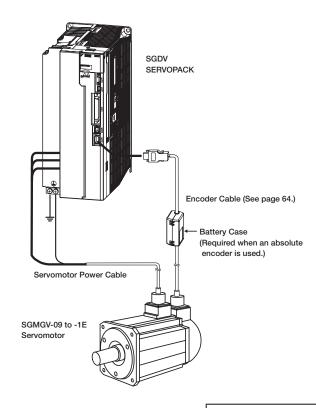

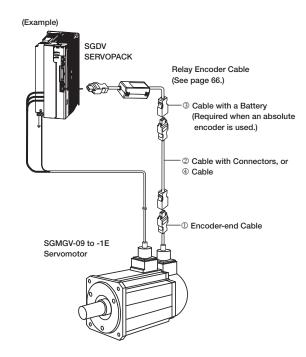

!CAUTION

- Separate the servomotor power cable wiring from the I/O signal cable and encoder cable at least 30 cm, and do not bundle or run them in the same duct.
- When the power cable length exceeds 20 m, note that the intermittent duty zone of the *Torque-Speed Characteristics* will shrink as the line-to-line voltage drops.

Selecting Cables (SGMGV-09 to -1E)

Servomotor Power Cable

Name	Servomotor	Length	Order No.	Specifications				
Name	Rated Output		Flexible Type	Opecinications	Details			
		3 m	JZSP-CVMCA11-03-E-G#					
		5 m	JZSP-CVMCA11-05-E-G#					
	0.85 kW	10 m	JZSP-CVMCA11-10-E-G#					
		15 m	JZSP-CVMCA11-15-E-G#					
		20 m	JZSP-CVMCA11-20-E-G#					
		3 m	JZSP-CVMCA12-03-E-G#					
		5 m	JZSP-CVMCA12-05-E-G#					
	1.3 to 1.8 kW	10 m	JZSP-CVMCA12-10-E-G#					
		15 m	JZSP-CVMCA12-15-E-G#					
		20 m	JZSP-CVMCA12-20-E-G#					
		3 m	JZSP-CVMCA13-03-E-G#					
	0.013W4-	5 m	JZSP-CVMCA13-05-E-G#	1				
	2.9 kW to	10 m	JZSP-CVMCA13-10-E-G#	Servomotor side Servopack side				
For	4.4 kW	15 m	JZSP-CVMCA13-15-E-G#	. Corvopack side				
Servomotor		20 m	JZSP-CVMCA13-20-E-G#		41)			
without Holding		3 m	JZSP-CVMCA14-03-E-G#		(1)			
Brakes		5 m	JZSP-CVMCA14-05-E-G#					
	5.5 kW	10 m	JZSP-CVMCA14-10-E-G#					
	0.0 км	15 m	JZSP-CVMCA14-15-E-G#					
		20 m	JZSP-CVMCA14-20-E-G#					
	7.5 kW to 11 kW	3 m	JZSP-CVMCA15-03-E-G#					
		5 m	JZSP-CVMCA15-05-E-G#					
		10 m	JZSP-CVMCA15-10-E-G#					
		15 m	JZSP-CVMCA15-15-E-G#					
		20 m	JZSP-CVMCA15-20-E-G#					
	15 kW	3 m	JZSP-CVMCA16-03-E-G#					
		5 m	JZSP-CVMCA16-05-E-G#					
		10 m	JZSP-CVMCA16-10-E-G#					
		15 m	JZSP-CVMCA16-15-E-G#					
		20 m	JZSP-CVMCA16-20-E-G#					
		3 m	JZSP-CVB12Y-03-E-G#	L				
For Servomotor		5 m	JZSP-CVB12Y-05-E-G#	Servomotor side DC Input side				
with	0.85 kW to 15 kW	10 m	JZSP-CVB12Y-10-E-G#		(2)			
Holding Brakes		15 m	JZSP-CVB12Y-15-E-G#					
		20 m	JZSP-CVB12Y-20-E-G#	'				
	0.85 kW to 1.8 kW		CE05-6A18-10SD-D (plug), CE18BA-S-D (Back shell), CE05-18BS-S-D (Adapter shell), CE3057-10A-1-D (clamp)					
Servomotor- end Connector Kit	2.9 kW to 4.4 kW		CE05-6A22-22SD-D (plug), CE22BA-S-D (Back shell), CE05-22BS-S-D (Adapter shell), CE3057-12A-1-D (clamp)					
	5.5 kW to 15 kW		CE05-6A32-17SD-D (plug), CE05-32BSSC-S-D (Shell), CE3057-20A-X-D (clamp)					
Holding Brake Connector Kit	0.85 kW to 15 kW		CM10Y-AP2S-M-D-G1					

Note: The digit "#" of the order number represents the design revision.

Selecting Cables (SGMGV-09 to -1E)

Servomotor Power Cable (200-V Class)

Customers must assemble the servomotor's power cables and attach connectors to connect the SERVOPACKs and the SGMGV servomotors.


The connectors specified by Yaskawa are required. Note that the connectors vary depending on the operation environment of servomotors.

Two types of connectors are available.


- Standard connectors
- Protective structure IP67 and European Safety Standards compliant connectors

Yaskawa does not specify which cables to use. Use appropriate cables for the connectors.


(1) Wiring Specifications for Servomotors without Holding Brakes



(2) Wiring Specifications for Servomotor with Holding Brakes



Note: No polarity for connection to a holding brake.

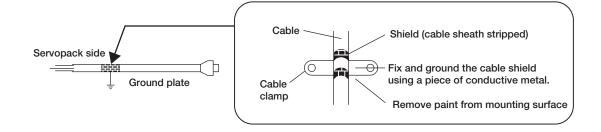


∑-V SERIES


Selecting Cables (SGMGV-09 to -1E)

Standard Connectors

Connector Configuration

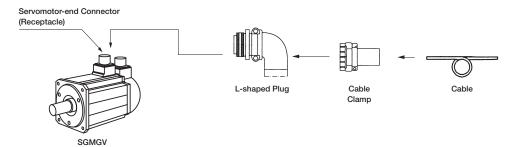

(1) Without Holding Brakes








Capacity kW	Servomotor-end Connector (Receptacle)	Cable-end Connector (Not provided by Yaskawa)			
KVV	Confidential (Fieldeptacle)	L-shaped Plug	Cable Clamp		
0.85 1.3 1.8	CE05-2A18-10PD-D (MS3102A18-10P)	MS3108B18-10S	MS3057-10A		
2.9 4.4	CE05-2A22-22PD-D (MS3102A22-22P)	MS3108B22-22S	MS3057-12A		
5.5 to 15	CE05-2A32-17PD-D (MS3102A32-17P	MS3108B32-17S	MS3057-20A		

- Notes: 1 Servomotor-end connectors (receptacles) are RoHS-compliant. Contact the respective connector manufacturers for RoHS-compliant cable-end connectors (not provided by Yaskawa).
 - 2 Servomotor-end connectors (receptacles) can be used with MS plugs. For the model number of the MS receptacle, refer to the receptacle number in parentheses and select the appropriate plug.

(2) With Holding Brakes

0.85 to 15 kW servomotors require servomotor-end connector and brake power supply connector.

The servomotor-end connector is the same as is used for servomotors without holding brakes.



Brake Power Supply Connector 0.85 to 15 kW



Capacity kW	Servomotor-end Connector	Cable-end Connector (Not provided by Yaskawa)					
KVV	(Receptacle)	L-shaped Plug	Manufacturer				
0.85 to 15	CM10-R2P-D	CM10Y-AP2S-M-D-G1 Applicable Cable: 6.0 dia. to 9.0 dia.	DDK Ltd.				

Selecting Cables (SGMGV-09 to -1E)

• Cable-end Connectors


(1) MS3108B S:

Units: mm

L-shaped	l Plug
o A	

Shell Size	Joint Screw A	Length of Joint Portion J±0.12	Overall Length L max.	Outer Diameter of Joint Nut Q +0 -0.38	R ±0.5	U ±0.5	Cable Clamp Set Screw V	Effective Screw Length W min.
18	1-1/8-18UNEF	18.26	68.27	34.13	20.5	30.2	1-20UNEF	9.53
22	1-3/8-18UNEF	18.26	76.98	40.48	24.1	33.3	1-3/16-18UNEF	9.53
32	2-18UNS	18.26	95.25	56.33	32.8	44.4	1-3/4-18UNS	11.13


(2) MS3057- A: Cable Clamp with Rubber Bushing



Units: mm

Cable Clamp Type	Applicable Connector Shell Size	Overall Length A±0.7	Effective Screw Length C	E Diameter	G±0.7	н	J Diameter	Set Screw V	Outer Diameter Q±0.7 Dia.	Attached Bushing
MS3057-10A	18	23.8	10.3	15.9	31.7	3.2	14.3	1-20UNEF	30.1	AN3420-10
MS3057-12A	20, 22	23.8	10.3	19	37.3	4	15.9	1-3/16-18UNEF	35.0	AN3420-12
MS3057-20A	32	27.8	11.9	31.7	51.6	6.3	23.8	1-3/4-18UNS	51.6	AN3420-20

• Dimensional Drawings of Brake Power Supply



items	Specifications
Connector Order No.	CM10-□P2S-□-D (Cables are not included.)
Protective Structure	IP67
Manufacturer	DDK Ltd.
Instructions	L-shaped plug (CM10Y-AP2SD-G1): TC-573
	Electrical contact (100 pcs in one bag)
	 Crimped type: CM10-#22SC(C3)(D8)-100, Wire size: AWG16 to 20,
	Outer diameter of sheath: 1.87 to 2.45 dia., Hand tool: 357J-50448T
	Soldered type: CM10-#22SC(S2)(D8)-100, Wire size: AWG16 max.
Electrical Contact	Real contact (4000 pcs on one reel)
Order No.	 Crimped type: CM10-#22SC(C3)(D8)-4000, Wire size: AWG 16 to 20,
Order No.	Outer diameter of sheath: 1.87 to 2.45 dia.,
	Semi-automatic tool: AP-A50541T (product name for one set),
	AP-A50541T-1 (product name for applicator)
	Note: The product name of the semi-automatic tool refers to the product name of the
	press and applicator (crimper) as a set.

Selecting Cables (SGMGV-09 to -1E)

● Protective Structure IP67 and European Safety Standards Compliant Connector

Connector Configuration



SGMGV Servomotor


Note: For the conduit grounding, contact the manufacturer of the conduit being used.

(1) Without Holding Brakes

Servomotor-end Connector For 0.85 to 15 kW








	0	Cable-end Connector (Not Provided by Yaskawa)			
Capacity kW	Servomotor-end Connector (Receptacle)	L-shaped Plug	Cable Clamp	Applicable Cable Diameter (For Reference)	Manufacturer
0.85	0505 0440	0505 0440	CE3057-10A-1-D	10.5 dia. to 14.1 dia.	
1.3	CE05-2A18- 10PD-D	CE05-8A18- 10SD-D-BAS	CE3057-10A-2-D	8.5 dia. to 11.0 dia.	
1.8	101 5-5	1000-0-040	CE3057-10A-3-D	6.5 dia. to 8.7 dia.	
			CE3057-12A-1-D	12.5 dia. to 16.0 dia.	
2.9	CE05-2A22- 22PD-D	CE05-8A22-	CE3057-12A-2-D	9.5 dia. to 13.0 dia.	DDK Ltd.
4.4		22SD-D-BAS	CE3057-12A-3-D	6.8 dia. to 10.0 dia.	DDK Ltd.
			CE3057-12A-7-D	14.5 dia. to 17.0 dia.	
5.5	CE05-2A32- 17PD-D	0=0= 0100	CE3057-20A-1-D	22 dia. to 23.8 dia.	
to		CE05-8A32- 17SD-D-BAS	CE3057-20A-2-D	24 dia. to 26.6 dia.	
15	171 0-0	170D-D-DA3	CE3057-20A-3-D	22 dia. to 22.5 dia.	

(2) With Holding Brakes

 $0.85\ to\ 15\ kW$ servomotors require servomotor-end connector and brake power supply connector. The servomotor-end connector is the same as is used for servomotors without holding brakes.



Brake Power Supply Connector 0.85 to 15 kW



Capacity kW	Servomotor-end Connector	Cable-end Connector (Not provided by Yaskawa)		
KVV	(Receptacle)	L-shaped Plug	Manufacturer	
0.85 to 15	CM10-R2P-D	CM10Y-AP2S-M-D-G1 Applicable Cable: 6.0 dia. to 9.0 dia.	DDK Ltd.	

Selecting Cables

• Encoder Cables (Max. length: 20 m)

Name	Length (L)	Order No. Flexible Type	Specifications	Details
	3 m	JZSP-CVP12-03-E-G#	SERVOPACK End , Encoder End	
Encoder Cable with	5 m	JZSP-CVP12-05-E-G#		
Connectors (For Incremental	10 m	JZSP-CVP12-10-E-G#		(1)
Encoder)	15 m	JZSP-CVP12-15-E-G#	Connector (Crimped) CM10-AP10S-□-D	
,	20 m	JZSP-CVP12-20-E-G#	(Molex Japan Co., Ltd.) (DDK Ltd.)	
	3 m	JZSP-CVP27-03-E-G#	SERVOPACK End Encoder End	
Encoder Cable with	5 m	JZSP-CVP27-05-E-G#		(2)
Connectors (For Absolute Encoder,	10 m	JZSP-CVP27-10-E-G#	Battery Case Connector (Battery Attached) CM10-AP10S-□-D	
with a Battery Case)	15 m	JZSP-CVP27-15-E-G#		
, , ,	20 m	JZSP-CVP27-20-E-G#	(Crimped)(Molex Japan Co., Ltd.) (DDK Ltd.)	
SERVOPACK-end Connector Kit		JZSP-CMP9-1-E	Soldered (Molex Japan Co., Ltd.)	(3)
Encoder-end Connectors for Protective Structure IP67 L-shaped Plug		CM10-AP10S-M-D-G1 (Connector Kit including contacts)	(DDK Ltd.)	-


Note: The digit "#" of the order number represents the design revision.

Selecting Cables

- (1) Wiring Specifications for Cable with Connectors (For incremental encoder)
- Flexible Type

SERVOP	ACK End		Encoder (Servomotor) End		
Pin No.	Signal	/-×	Pin No.	Wire Color	
6	/PS	' 	5	Yellow	
5	PS		4	Green	
4	BAT (-)		8	Pink	
3	BAT (+)		9	Grey	
2	PG 0V		3	Brown	
1	PG 5V		6	White	
Shell	FG	21:11	Shell	FG	
	Shield Wire				

- (2) Wiring Specifications for Cable with Connectors (For absolute encoder, with a battery case)
- Flexible Type



(3) SERVOPACK-end Connector Kit Specifications

Items	Specifications	
Order No.	JZSP-CMP9-1-E	
Manufacturer	Molex Japan Co., Ltd.	
Connector Model (For standard)	55100-0670 (soldered)	
External Dimensions (Units: mm)	(6) (33) (33)	

(4) Cable Specifications

Items	Flexible Type	
Cable Length	20 m max.	
Specifications	UL20276 (Rating temperature: 80°C) AWG22×2C + AWG24×2P AWG22 (0.33 mm²) Outer diameter of insulating sheath: 1.35 dia. AWG24 (0.20 mm²) Outer diameter of insulating sheath: 1.21 dia.	
Finished Dimensions	6.8 dia.	
Internal Configuration and Lead Color	Black/ light blue Black/ pink Red/ pink	

Selecting Cables

• Encoder Cables (For extending from 30 to 50 m)


Name Le		Order No.	Specifications	Details
① Encoder-end Cables	0.3 m	JZSP-CVP01-E	SERVOPACK End 0.3 m Encoder End Plug Connector (Crimped) (Molex Japan Co., Ltd.) CM10-SP10S-□-D (DDK Ltd.)	(1)
(For incremental and absolute encoder)	0.5 111	JZSP-CVP02-E	SERVOPACK End 0.3 m Plug Connector (Crimped) (Molex Japan Co., Ltd.) Encoder End CM10-AP10S-□-D (DDK Ltd.)	(1)
©	30 m	JZSP-UCMP00-30-E	SERVOPACK End L Encoder End	
Cable with Connectors (For incremental and	40 m	JZSP-UCMP00-40-E	Connector (Crimped) Socket Connector (Soldered)	(2)
absolute encoder)	50 m	JZSP-UCMP00-50-E	(Molex Japan Co., Ltd.) (Molex Japan Co., Ltd.)	
③ Cable with a Battery Case (Required when an absolute encoder is used.*)	0.3 m	JZSP-CSP12-E	SERVOPACK End 0.3 m Encoder End Battery Case (Battery attached) Connector (Crimped) (Molex Japan Co., Ltd.) Socket Connector (Soldered) (Molex Japan Co., Ltd.)	(3)
	30 m	JZSP-CMP19-30-E		
④ Cables	40 m J			(4)
	50 m	JZSP-CMP19-50-E	_	

^{*:} Not required when connecting a battery to the host controller.

Σ Σ -V SERIES Σ -V SERIES


Selecting Cables

(1) Wiring Specifications for Encoder-end Cable (For incremental and absolute encoder)



Note: The signals BAT(+) and BAT(-) are used when using an absolute encoder.

(2) Wiring Specifications for Cable with Connectors (For incremental and absolute encoder)



(3) Wiring Specifications for Cable with a Battery Case (For absolute encoder)

SERVOPACK End			Encoder (S	ervomotor) End
Pin No.	Signal	. .	Pin No.	Wire Color
6	/PS		6	Light blue/white
5	PS		5	Light blue
4	BAT (-)	* / •	4	Orange/white
3	BAT (+)	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	3	Orange
2	PG 0V	++>>	2	Black
1	PG 5V	- \ 	1	Red
Shell	FG		Shell	FG
Batte	ry Case	Shield Shield Wire		
Pin No.	Signal	vvire		
2	BAT (-)			
1	BAT (+)			

(4) Cable Specifications

Item	Standard Type	
Order No.	JZSP-CMP19-□□-E	
Cable Length	50 m max.	
Specifications	UL20276 (Rating temperature: 80°C) AWG16×2C+AWG26×2P AWG16 (1.31 mm²) Outer diameter of insulating sheath: 2.0 dia. AWG26 (0.13 mm²) Outer diameter of insulating sheath: 0.91 dia.	
Finished Dimensions	6.8 dia.	
Internal Configuration and Lead Colors	Orange Orange /white Black Light Blue Light Blue /white	
Yaskawa Standard Specifications (Standard Length)	Cable length: 30 m, 40 m, 50 m	

^{*:} Specify the cable length in \(\subseteq \text{of order no.} \)
Example: JZSP-CMP19-30-E (30 m)